



Kleenpak™ Disposable Shower Head Filter

Contact Us: www.pall.com/contact

Description

For up to 31 Day Use

Features	Benefits
Immediate barrier against waterborne micro organisms for up to 31 days	Allows continuity of services. Adjunct to water management practices
Unique Ultrafine filtration media engineering	High dirt trapping capacity to allow maximum volume throughput. Compatible with thermal and chemical systemic treatments
Long filter life	Cost effective, convenient logistics, reduced waste, no shelf life limitation
Advanced renegade contamination control measures	Bacteriostatic additive throughout housings minimizes the risk of renegade contamination
Fully recyclable materials	Environmentally friendly



Specifications

Membrane Area

➤ 1,000 cm² nominal

Membrane

➤ 0.2 µm Supor® media incorporating graded pre-filtration membrane

Length (Excluding Quick Connect Adaptor)

➤ 240 mm nominal

Maximum Upstream Operating Pressure

➤ 5 bar

Maximum Filter Life

➤ 31 days

Maximum Continuous Influent Water Temperature

➤ 60 °C

Maximum Water Temperature Exposure

➤ 70 °C for a total cumulative period of 30 mins over the life of the filter

Typical Water Flow Rates (with Non-Restricted Connectors)


➤ 33.8 L/min at 5 bar

➤ 22.8 L/min at 3 bar

➤ 10.4 L/min at 1 bar

Installation

Connection is made simple by use of Quick Connect Adaptors which require no additional plumbing, engineering work or interruption to the water supply. The simple steps for installation are shown below.

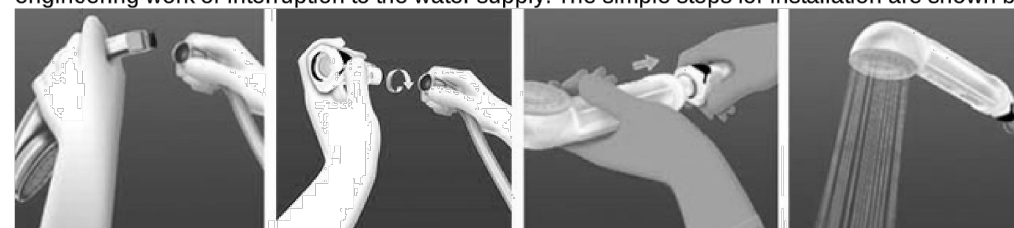

For information on Quick Connect Adaptors, click here.

Ordering Information

Part Number	Description	Pkg
KAQK4	Disposable Shower Head Filter for up to 31 days use	129kg
KAQK42	Disposable Shower Head Filter for up to 31 days use	21kg

For information on Quick Connect Adaptors, click here.

For more information on to order please contact us:

- France 0800 008 845, info@pall.com
- Germany 0800 994 6 564, info@pall.com
- Italy +39 02 488870262, info@pall.com
- UK 44(0) 2392 303452, info@pall.com
- US & Canada 866-347-3428, pallwater.us@pall.com

Contact Information

Pall Office(s)

Pall Life Sciences

5 Harbourside Business Park
Southampton Road
Portsmouth,
PO6 1SD
United Kingdom
Phone: +44 (0) 2392 338111
➤ Sales Office Contact Details
Phone: +44 (0) 2392 338000
➤ Switchboard Number
Fax: +44 (0) 2392 338100
Email: bio@pall.com

© 2014, Pall Corporation. Pall, and other names are trademarks of Pall Corporation.
® indicates a registered trademark in the USA.


(FILTER FURNISHED BY GOVERNMENT)

3 HAND SHOWER IN-LINE WATER FILTER — 0.2 MICRONS
1-P28 SCALE: NO SCALE

MULTI-HOUSING FILTER SYSTEMS




Model NS-223-V

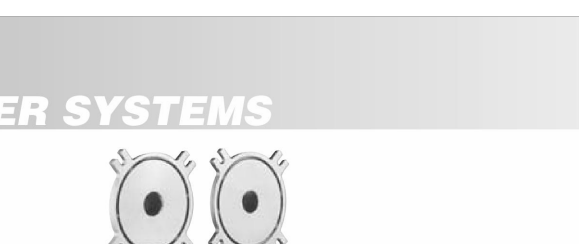

Model NS-424-V

DUAL FILTER VESSELS FOR NORTH WING POINT OF SERVICE FILTRATION

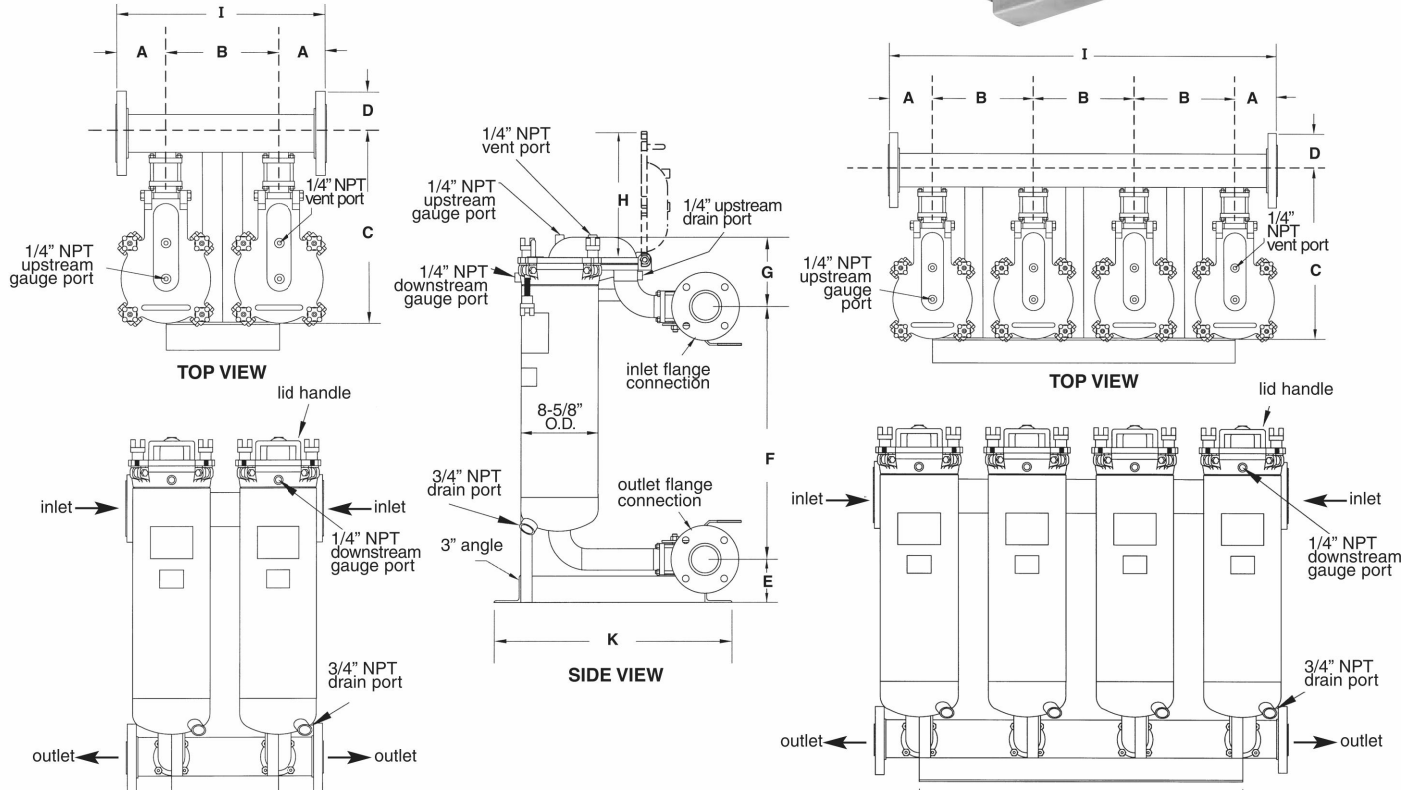

MODEL	NO. OF HOUSINGS	FLANGE SIZE (INCHES)	MAXIMUM FLOW RATE (GPM) @ 2 PSI	LIQUID VOLUME (GALLONS)	2 TO 12 MODULES AVAILABLE ALL DIMENSIONS ARE IN INCHES																SHIPPING WEIGHT (LBS)
					A	B	C	D	E	F	G	H	I	J	K	L					
NS-223-V	2	3	440	16.6	11.12	12.50	13.84	15.24	16.64	18.04	19.44	20.84	22.24	23.64	25.04	26.44	27.84	29.24			
NS-223-V	3	4	660	24.9	16.64	18.04	19.44	20.84	22.24	23.64	25.04	26.44	27.84	29.24	30.64	32.04	33.44	34.84			
NS-223-V	4	5	880	33.2	25.04	26.44	27.84	29.24	30.64	32.04	33.44	34.84	36.24	37.64	39.04	40.44	41.84	43.24			
NS-223-V	5	6	1100	41.5	30.64	32.04	33.44	34.84	36.24	37.64	39.04	40.44	41.84	43.24	44.64	46.04	47.44	48.84			
NS-223-V	6	6	1100	41.5	32.04	33.44	34.84	36.24	37.64	39.04	40.44	41.84	43.24	44.64	46.04	47.44	48.84	50.24			
NS-223-V	7	6	1100	41.5	33.44	34.84	36.24	37.64	39.04	40.44	41.84	43.24	44.64	46.04	47.44	48.84	50.24	51.64			
NS-223-V	8	6	1100	41.5	34.84	36.24	37.64	39.04	40.44	41.84	43.24	44.64	46.04	47.44	48.84	50.24	51.64	53.04			
NS-223-V	9	6	1100	41.5	36.24	37.64	39.04	40.44	41.84	43.24	44.64	46.04	47.44	48.84	50.24	51.64	53.04	54.44			
NS-223-V	10	6	1100	41.5	37.64	39.04	40.44	41.84	43.24	44.64	46.04	47.44	48.84	50.24	51.64	53.04	54.44	55.84			
NS-223-V	11	8	2450	140.6	51.64	53.04	54.44	55.84	57.24	58.64	60.04	61.44	62.84	64.24	65.64	67.04	68.44	69.84			
NS-223-V	12	8	2450	140.6	53.04	54.44	55.84	57.24	58.64	60.04	61.44	62.84	64.24	65.64	67.04	68.44	69.84	71.24			